



## LED T5 Batten S with switch

- Uniform, diffused light, creating a pleasant atmosphere
- Available in 300, 600, 900 and 1200 mm
- Maximum connectivity up to 10 pieces allows maximum flexibility
- Incl. power cable, connection pieces (fixed and flexible)
- Including integrated switch
- Energy saving up to 50%

40,000 h  
L70B50

30,000 h  
L80B50

## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Energy Level
140044292	LED E T5 batten 1200 13W S 4000K BL	TL 1x30W	13	1200	92	4000	A+

## Packaging Information

Item		Box			
Item Code	Item Description	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
140044292	LED E T5 batten 1200 13W S 4000K BL	1525x29x37	0.45	6956712612724	1
140044292	LED E T5 batten 1200 13W S 4000K BL	1535x165x95	5.10	6956712631688	10

### Technical Specifications

On-/Off-cycles	100,000
Dimmable	No
Beam angle	140 °
Finishing	White
Colour rendering index CRI	≥ 80
Degree of protection (IP)	IP20
Protection class	II
Control gear included	Yes
Weight (kg/pc)	0.25
Power factor	≥ 0.90

### Electrical Supply


Frequency	50/60 Hz
Nominal voltage	220-240 V
Voltage type	AC

### Mechanical Properties

Material housing	Polycarbonate
------------------	---------------


### Ambient Conditions

Operating temperature	-20 - 40 °C
Application temperature	25 °C
Storage environment	-25 - 50 °C



## Dimensional Drawing (mm)

LED E T5 batten 1200

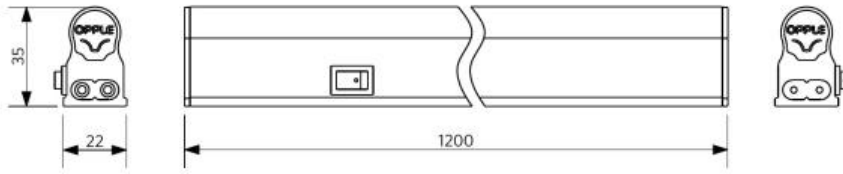

## Photometric Data

LED E T5 batten 1200

