



LED Downlight Slim EcoMax

- Very flat design, only 34mm height
- Available in both round and square version
- Integrated driver for easier installation
- Two lumen packages
- Efficacy up to 85 lm/W



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
140056557	LEDDownlightRc-SI-E Rd150-12W-3000-WH	CFL 1x18W	12	1020	85	3000	0.25

Available on request with 3- pole Wieland GST18i connector

Accessories



140060653
LEDDownlightRc-SI-E-Adapter-150-175

Packaging Information

Item		Box			
Item Code	Item Description	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
140056557	LEDDownlightRc-SI-E Rd150-12W-3000-WH	190x190x53	0.36	6956321885724	1
140060653	LEDDownlightRc-SI-E-Adapter-150-175	251x251x5	0.10	6956321894191	1

Technical Specifications

Lifespan (L70B50)	40,000 h
Lifespan (L80B50)	20,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	3
Dimmable	No
Beam angle	112 °
Finishing	White RAL9003
Colour rendering index CRI	≥ 80
Degree of protection (IP)	IP44
IP recessed part	IP20
Impact strength	IK02
Protection class	II
Risk group	RG0
Control gear included	Yes
Glow wire test	650 °C
Driver failure rate (at 5,000 hrs)	1 %
Power factor	≥ 0.90

Electrical Supply


Frequency	50/60 Hz
Nominal voltage	220-240 V
	AC
DC input voltage	No

Mechanical Properties

Material housing	Plastic
Optical material	Polycarbonate

Ambient Conditions


Operating temperature	-10 ~ 40 °C
Application temperature	25 °C
Storage environment	-25 ~ 50 °C



Dimensional Drawing (mm)


LEDDownlightRc-SI-E Rd150

Adapter-150-175

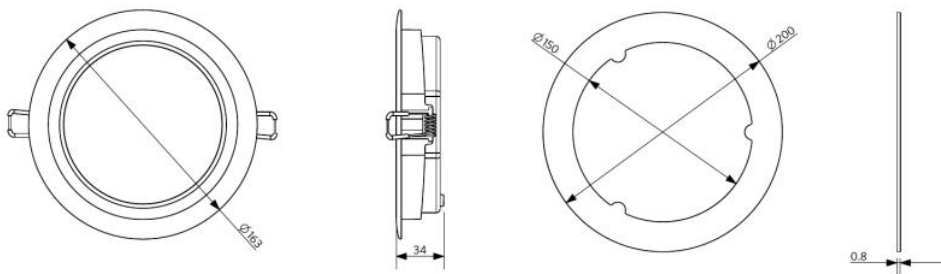

Photometric Data

LEDDownlightRc-SI-E Rd150

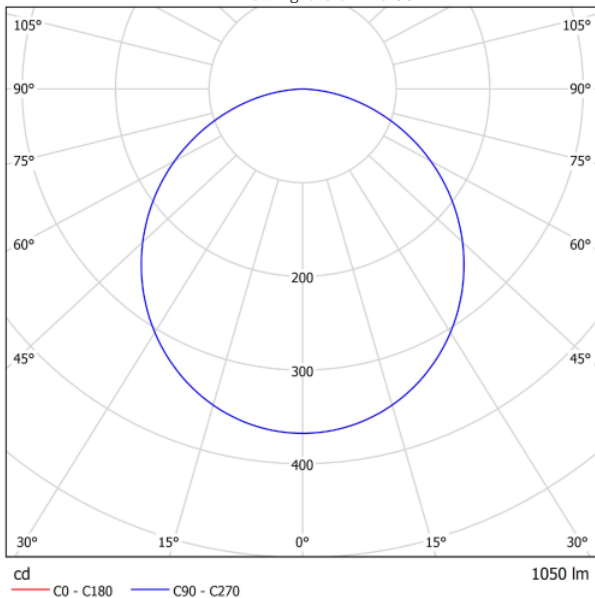

Installation Opening Drawing (mm)

LEDDownlightRc-SI-E Rd150
 Ø150

