Technical Datasheet for 30W led corn bulb



Special Features:

Build-in Isolated Driver with 5-7 years lifetime(New technology)
 Build-in Driver with unique technology , lasting 5-7 years. So our LED street light's lifespan can reach 40,000 hours, and according to 12 hours working per day, it can be constantly u sed for more than 5-year.

2, **LED**

- A, 2835 SMD LED
- B, High CRI: >75
- C, Super bright LED, up to 30Lm/pc

3.Build-in Z –Diodes (New technology)

Even if one led failed, the remaining LEDs will still work.

4. Warranty Policy

3 years warranty with original written warranty; 20,000 switch cycles(on/off switching).

5, Safety

Patented design for thermal structure . no danger to touch the LED because it will be protected by cover .

6, Simple

It is easy to use and install with the instruction manual .

7, Professional

Full installation instructions and diagrams provided .

8, Principles

Fully compliant with electrical Safety standards: CE, TUV, PSE, FCC

Photobiological Safety standards: EN 62471

Hazardous materials restriction standards: RoHS

Quality Management standards: ISO 9001

Application:





- 1. Street Lighting
- 2. Sporting area Lighting
- 3. Square, parks, roads, factories, airports, subway, courtyard
- 4. Others

Drawing:



E27/E26




E40/E39

Technical Specification:

Item NO.	AZG-SLE40-30W	
Replacement	70w Sodium lamp	
LED Source	5730 SMD LED	
Base	E27/E26 or E40/E39	
LED Initial Flux	3000-3300Lm	
Lamp Power	30W±10%	
Power Efficiency	90%	
Lamp Flux	3000lm	


Lamp's Efficiency	100lm/w	
Bean Angle	360 degree	
Light Distribution Curve (Beam Pattern)	Asymmetric(Bat Wing)/Rectangular Beam	
Input Voltage	AC90-277V	
Frequency Range	47-63Hz	
Power Factor (PF)	>0.95	
Total Harmonic Distribution(THD)	<16%	
Storage Temperature	-20°C+80°C	
Working Environment	-20°C+50°C:10%-95%RH	
Junction Temperature (Tj)	60°C ±10% (ta=25°C)	
Light Body and Lampshade Material	Aluminum Alloy and PC	
Working Lifetime	50000hrs	
IP Rating	IP55	
Weight	0.5kg	
Product Size (mm)	Ф 96Х250	

Light distribution Curve (IES File available, please contact us)




Illuminance Test:


AZG-SLWW-30W



AZG -SLW-30W



Packing Details:

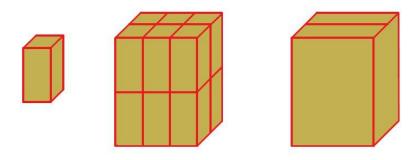

Part No.	Item Size	Packing Qty	Gross Weight	Carton Size(L*W*H)
AZG-SLE40-30W	Ф 96X250mm	12Pcs	7 kg	400x270x480mm

Caution & Warning:

- 1. Use indoor or some place where no water.
- 2. Work under the fixed voltage.
- 3. PIs operate in the right way when you install the LED Street light in case to avoid the power harm and body harm. When installing, please note the short-circuit protect such as the socket with the fuse.
- 4. non-dimmable
- 5. If any doubt about the installation or use of this product, consult a competent electrician or technician .