



## LED Spot Performer Swing

- Powerful recessed, rotatable and tiltable spot
- Clean, compact design
- Die-cast aluminium housing
- Excellent colour rendering with CRI 90
- High efficiency up to 100 lm/W



## Specifications

| Item Code    | Item Description            | Equivalent to (W) | Power (W) | Lumen | Efficacy (lm/W) | CCT (K) | Beam angle | Weight (kg/pc) |
|--------------|-----------------------------|-------------------|-----------|-------|-----------------|---------|------------|----------------|
| 541003067900 | LEDSpotRS-P 20W-4000-60D-WH | HID 35W           | 20        | 2000  | 100             | 4000    | 60 °       | 0.57           |

## Packaging Information

| Item         |                             | Box                     |                   |               |        |
|--------------|-----------------------------|-------------------------|-------------------|---------------|--------|
| Item Code    | Item Description            | Dimensions (mm) (LxWxH) | Gross Weight (kg) | EAN           | pc/box |
| 541003067900 | LEDSpotRS-P 20W-4000-60D-WH | 160x160x130             | 0.78              | 6941408808239 | 1      |

### Technical Specifications

|                                    |          |
|------------------------------------|----------|
| Lifespan (L70B50)                  | 50,000 h |
| Lifespan (L80B50)                  | 30,000 h |
| On-/Off-cycles                     | 100,000  |
| Colour consistency (SDCM)          | 3        |
| Dimmable                           | No       |
| Maximum tilt angle                 | 40 °     |
| Finishing                          | White    |
| Colour rendering index CRI         | ≥ 90     |
| Degree of protection (IP)          | IP20     |
| Impact strength                    | IK03     |
| Protection class                   | II       |
| Risk group                         | RG0      |
| Control gear included              | Yes      |
| Glow wire test                     | 650 °C   |
| Driver failure rate (at 5,000 hrs) | 0.5 %    |
| Power factor                       | ≥ 0.90   |

### Electrical Supply


|                  |              |
|------------------|--------------|
| Frequency        | 50/60 Hz     |
| Nominal voltage  | 220-240 V AC |
| DC input voltage | No           |

### Mechanical Properties



|                  |                      |
|------------------|----------------------|
| Material housing | Aluminium            |
| Optical material | Coated Polycarbonate |

### Ambient Conditions

|                         |             |
|-------------------------|-------------|
| Operating temperature   | -10 ~ 45 °C |
| Application temperature | 25 °C       |
| Storage environment     | -25 ~ 50 °C |



## Dimensional Drawing (mm)

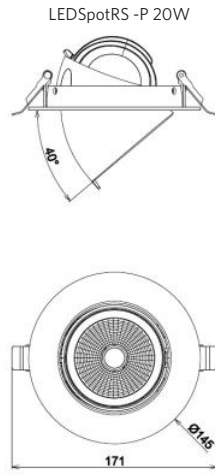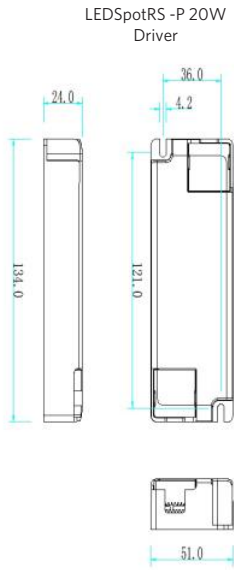

## Installation Opening Drawing (mm)

LEDSpotRS -P 20W  
Ø120-130

